



Utility Germicidal Fixtures

Utility Channel



"A" Series




"R" Series



Concentrated ultraviolet rays confined by specular half round reflector.

"GR" Series

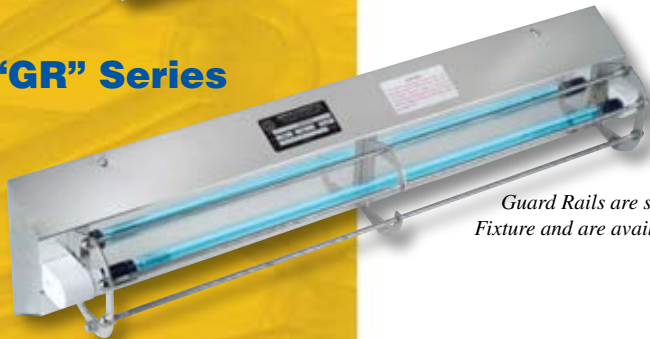

Guard Rails are shown here on an SM Series Fixture and are available on the GR Series.

American Ultraviolet Utility Germicidal Fixtures

are constructed of stainless steel and designed for general purpose air and surface sterilization. "A" and "R" Series fixtures include reflectors that help direct and confine ultraviolet rays for specific applications. Guardrail (GR) utility fixtures feature a 3/16" aluminum rod that helps protect the ultraviolet lamps from accidental breakage.

Applications

UF Series fixtures from American Ultraviolet are designed for general air and surface sterilization purposes and, because they can be mounted to walls and ceilings, inside chambers and equipment, and under counters, they can be effectively used in a wide variety of applications.

All American Ultraviolet utility fixtures are UL approved and can be ceiling mounted or suspended. Standard electrical operation is 120V/60Hz. Other voltages are available.

Benefits

- Direct air and surface sterilization of DNA-based contaminants
- Spectrally polished reflectors maximize UVC lamp output
- 17"-37" fixture lengths
- Single and dual lamp configurations
- Hot Cathode, Cold Cathode and Slimline fixtures available
- Simple, tool-free lamp change

AUV UF SERIES



Utility Germicidal Fixtures

Utility Channels

SINGLE LAMP			
Style	Lamp Required	U.V. Watts	Dimensions L W H
UF-30-C	GML010	8.3	37
UF-20-C	GML025	5.5	27
UF-10-C	GML020	2.8	17
UF-36	GML005	13.8	37
UF-10-SL	GML060	5.3	17
UF-30-H	GML220	8.3	37
UF-25-H	GML215	5.0	19
UF-15-H	GML210	3.6	19

DOUBLE LAMP			
Style	Lamp Required	U.V. Watts	Dimensions L W H
UF-30-2C	GML010 (2)	16.6	37
UF-20-2C	GML025 (2)	11.0	27
UF-10-2C	GML020 (2)	4.0	17
UF-36-2	GML005 (2)	27.6	37

“R” Series

SINGLE LAMP			
Style	Lamp Required	U.V. Watts	Dimensions L W H
UFR-30-C	GML010	8.3	37
UFR-20-C	GML025	5.5	27
UFR-10-C	GML020	2.8	17
UFR-36	GML005	13.8	37
UFR-10-SL	GML060	5.3	17
UFR-30-H	GML220	8.3	37
UFR-25-H	GML215	5.0	19
UFR-15-H	GML210	3.6	19

DOUBLE LAMP			
Style	Lamp Required	U.V. Watts	Dimensions L W H
UFR-30-2C	GML010 (2)	16.6	37
UFR-20-2C	GML025 (2)	11.0	27
UFR-10-2C	GML020 (2)	4.0	17
UFR-36-2	GML005 (2)	27.6	37

“A” Series Open End Reflector

SINGLE LAMP			
Style	Lamp Required	U.V. Watts	Dimensions L W H
UFA-30-C	GML010	8.3	37
UFA-20-C	GML025	5.5	27
UFA-10-C	GML020	2.8	17
UFA-36	GML005	13.8	37
UFA-10-SL	GML060	5.3	17
UFA-30-H	GML220	8.3	37
UFA-25-H	GML215	5.0	19
UFA-15-H	GML210	3.6	19

DOUBLE LAMP			
Style	Lamp Required	U.V. Watts	Dimensions L W H
UFA-30-2C	GML010 (2)	16.6	37
UFA-20-2C	GML025 (2)	11.0	27
UFA-10-2C	GML020 (2)	4.0	17
UFA-36-2	GML005 (2)	27.6	37

“GR” Series

SINGLE LAMP			
Style	Lamp Required	U.V. Watts	Dimensions L W H
GR-30-C	GML010	8.3	37
GR-20-C	GML025	5.5	27
GR-10-C	GML020	2.8	17
GR-36	GML005	13.8	37
GR-10-SL	GML060	5.3	17

DOUBLE LAMP			
Style	Lamp Required	U.V. Watts	Dimensions L W H
GR-30-2C	GML010 (2)	16.6	37
GR-20-2C	GML025 (2)	12.6	27
GR-10-2C	GML020 (2)	5.6	17
GR-36-2	GML005 (2)	29.6	37



American Ultraviolet®

Since 1960. It's all we do.

www.auvhvac.com

212 South Mt. Zion Road • Lebanon, IN 46052

(765) 483-9514 • (800) 288-9288

Represented by: